



GWS Machinery

ABN 34 002 790 730

5 Walker Street, South Windsor, NSW, 2756

Phone (02) 4577 4622 | Spare Parts (02) 4577 5833

ISEKI



MASSEY FERGUSON®



Kawasaki

Let the good times roll.



ISEKITM RANGE



20 & 23hp



TM Range Compact Tractors

Smart, Reliable...
Created with you in mind.



ISEKI

ISEKI TM RANGE TRACTORS

The new Iseki TM Series - your complete package for versatility and performance. Whether you're a small land-holder or a commercial enterprise, the new Iseki TM range of compact tractors will deliver the goods time and time again.

Powerful Iseki engines, strong construction and smartly designed operator area mean you get the job done fast, efficiently and in comfort. These are the typical hallmarks of Iseki tractors - built to uncompromising standards that have seen Iseki at the forefront of compact tractor design for over 80 years.

No matter whether you need a rugged, workhorse for agricultural applications or a smooth, soft-touch for turf requirements, the Iseki TM range has the right solution for all your business needs.

FEATURES

ENGINE

- Powerful Iseki 3 cylinder water-cooled engines.
- Quiet and efficient.
- Large displacement offers full power at low engine RPM.
- Removable side panels allow easy access to the engine, making service and regular maintenance easier.



HYDROSTATIC TRANSMISSION

- Two-range hydrostatic transmission.
- Separate pedals for forward & reverse directional control.
- 4 wheel-drive and differential lock for exceptional traction in all conditions.
- Wet disc brakes - large oil immersed multi-disc brakes.



CRUISE CONTROL

- Cruise control standard on the TM3240.
- Simple, lockable lever to maintain a constant speed.
- Ideal for applications where precise speeds are required.
- All metal levers for strength and durability.
- Conveniently located for on-the-move operation.



ISEKI Series TM SPECIFICATIONS

TM 3200 R.O.P.S

Model	TM3245	TM3265	Model	TM3245	TM3265	Model	TM3245	TM3265
Drive	4WD	4WD	Hydraulic System			Tyre Equipment		
Engine Specification			Description	Open centre		Standard Front (AG)	6.0-12	
Engine	E3112-B33	E3CD-B70	Pump Type	Gear		Standard Rear (AG)	9.5-18	
Number Cylinders/cc	3/1123	3/1498	Max l/min	33		Standard Front (TURF)	23x10.5-12	
Engine Power kW/hp	16.8/22.5	18.9/25.7	Remote outlets Std/max	2/2		Standard Rear (TURF)	315/75D15	
@ Rated speed	2600	2600	3 Point Linkage			Dimension/Weights		
Speed control	Manual pedal & cruise control		Type	Cat 1		Minimum Width	1100	
PTO			Control	Position		Height	2420	
PTO kW/hp	12.9/17.3	15/20.1	Lift - kg @ BE	600		Wheelbase	1560	
Type	Independent		Brakes and Steering			Dry Shipping Weight	825	845
Speeds Rear/Mid	540/2000		Brake type	Wet disc		Capacities		
Transmission			Steering type	Hydrostatic		Fuel	27	
Type	Hydrostatic							
Speeds Fwd/Rev	3 / 3							
Speed Range	F: 0-24.4 R:0-16.6							

Specifications, standard and optional equipment on products change from time to time. Please consult your local dealer to ensure your expectations are matched by the product which will be available locally at the time you take delivery.

20 & 23 HP compact tractors


THE ISEKI DIFFERENCE

When you choose Iseki, you're not simply buying a tractor, you're investing in 80 years of industry-leading engineering and manufacturing experience. Experience that continues to produce high quality and top performing products that are built to meet today's ever increasing demands.

While Iseki has made its mark internationally, you can still feel confident knowing that they understand the unique industries of each country. During their 25 years in the Australian market they have built solid and reliable foundations, continuously delivering superb products and services that work even harder for your specific needs.

You get the expertise of your local Iseki dealer who will match the right tractor to your business and even provide flexible finance options to help fund your purchase.

Combine this with peace of mind from first-class parts and service support and you'll see what we mean by the Iseki Difference.

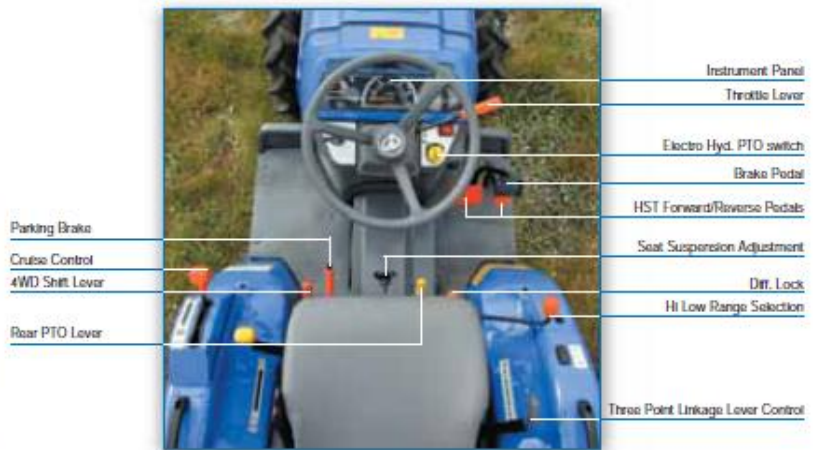

OPERATORS PLATFORM

- Large operator's deck with ample leg-room, enabling easy access for mounting and dismounting.
- Rubber mounted deck with full floor mat and rubber padded pedals, reducing vibration and driver fatigue.
- Easy to read instrument panel.
- Comfortable high back, fully adjustable spring suspension seat.



HEAVY DUTY AXLES

- Robust front and rear axles to handle the toughest of jobs.
- Reinforced chassis to handle a wide range of multi-purpose accessories.
- Designed with strength for front end loader applications.
- Tight turning circle.
- Large diameter tyres allow a gentler footprint & improve traction.



THREE POINT LINKAGE

- Large three point linkage lift capacity of 540 kg.
- Inner electro-hydraulic PTO.
- Rear & mid mount PTO allows flexibility for a variety of implements.
- Large 20 l/min hydraulic pump with open centre hydraulic system.
- Adjustable telescopic stabilisers & crank-type lift rod for easier implement attachment.



GWS Machinery

ABN 34 002 790 730

5 Walker Street, South Windsor, NSW, 2756

Phone (02) 4577 4622 | Spare Parts (02) 4577 5833